

DATA SHEET


C6B Force transducers

SPECIAL FEATURES

- Rugged compressive force transducers
- Nominal (rated) force 200 kN ... 10 MN
- Hermetically welded, versions with IP68 available
- Extensive mounting aids
- Can be configured with different cable lengths, plug fitting, integrated amplifier and TEDS on request




CONNECTION OPTIONS

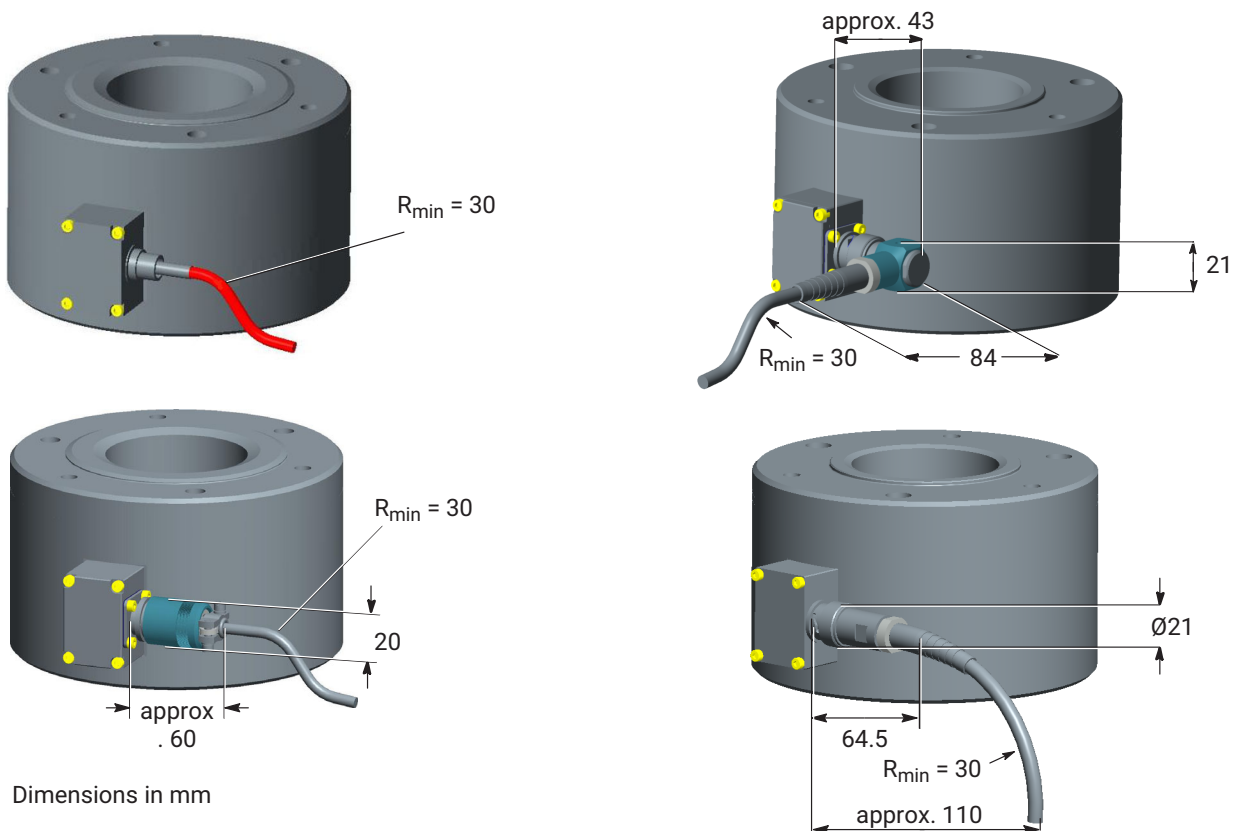

Dimensions in mm


ELECTRICAL CONNECTION

Pin assignment without integrated amplifier

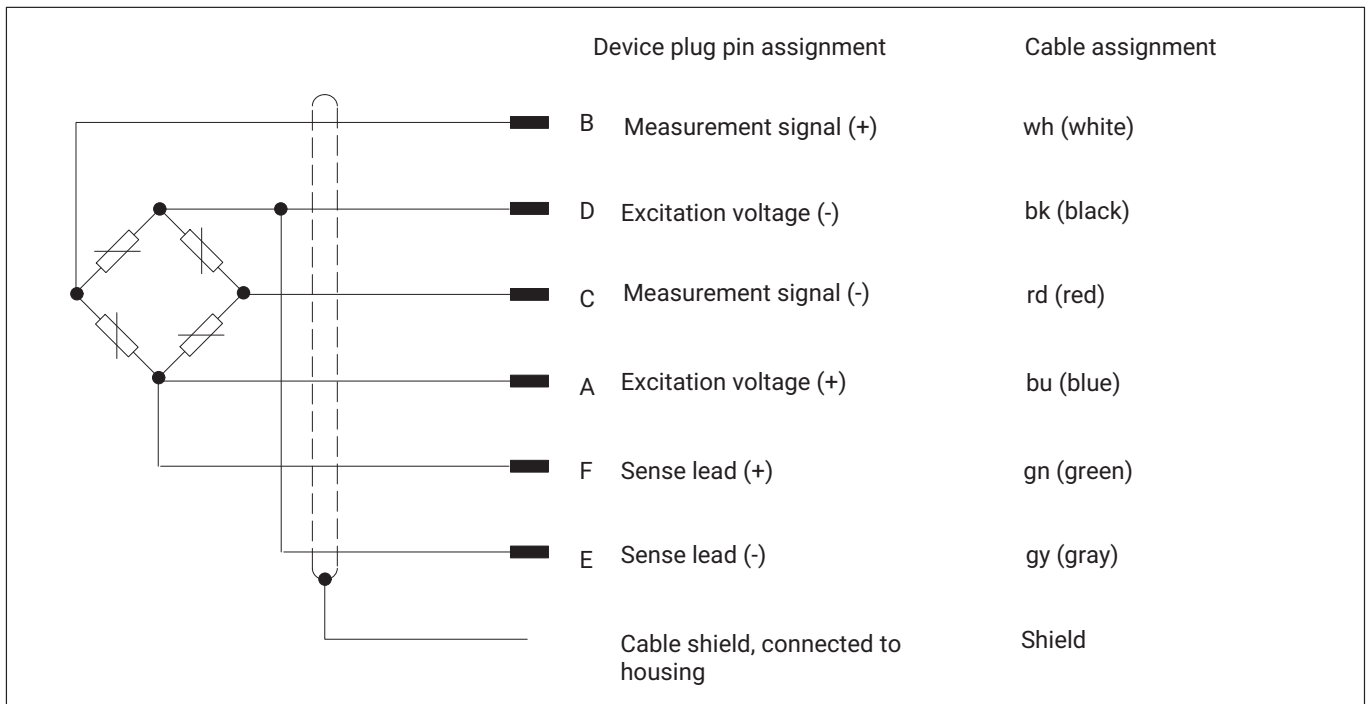


Pin assignment with integrated amplifier

Pin	Color code	M12 device plug		Cable assignment fixed cable with free end
		Version VA 1 (voltage output)	Version VA 2 (current output)	
1	White	Supply voltage 0 V (GND)		White
2	Brown	Not assigned		Black
3	Green	Zero control input		Green
4	Yellow	Not assigned		Not assigned
5	Gray	Output signal 0 ... 10 V	Output signal 4 ... 20 mA	Gray
6	Pink	Output signal 0 V	Not assigned	Blue
7	Blue	Not assigned		Not assigned
8	Red	Power supply +19...+30 V		Red
Cable shield, connected to housing				




DIMENSIONS (IN MM)

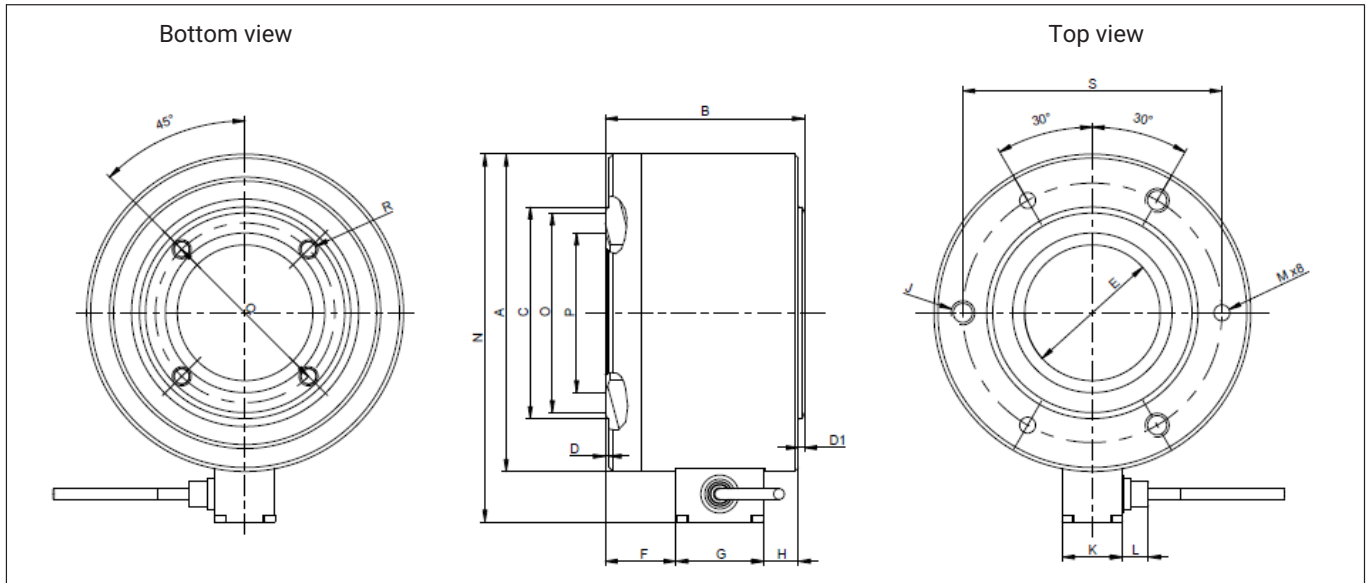

Nominal (rated) force	A	B	C ±0.1	D	D1	E ±0.1	F	G	H	J	K	L ¹⁾	L ²⁾	M H11	N ¹⁾	N ²⁾	O	P	Q ±0.1	R	S ±0.1
200 kN	80	60	40.4	1	1	32	16.25	42	0.75	M8, 8 mm deep	26	12	14	6	100	106	-	35	48	M6, 8 mm deep	64
500 kN	80	60	52	1	1	32	16.25	42	0.75		26	12	14	6	100	106	-	-	42		64
1 MN	159	100	88	2	3	68	35.5	44	17.5	M12, 15 mm deep	31	12	14	8	184	186	-	75	98	M8, 15 mm deep	130
2 MN	159	100	106	2	3	68	35.5	44	17.5		31	12	14	8	184	186	100	80	90		130


- 1) Fixed cable option
- 2) Plug option

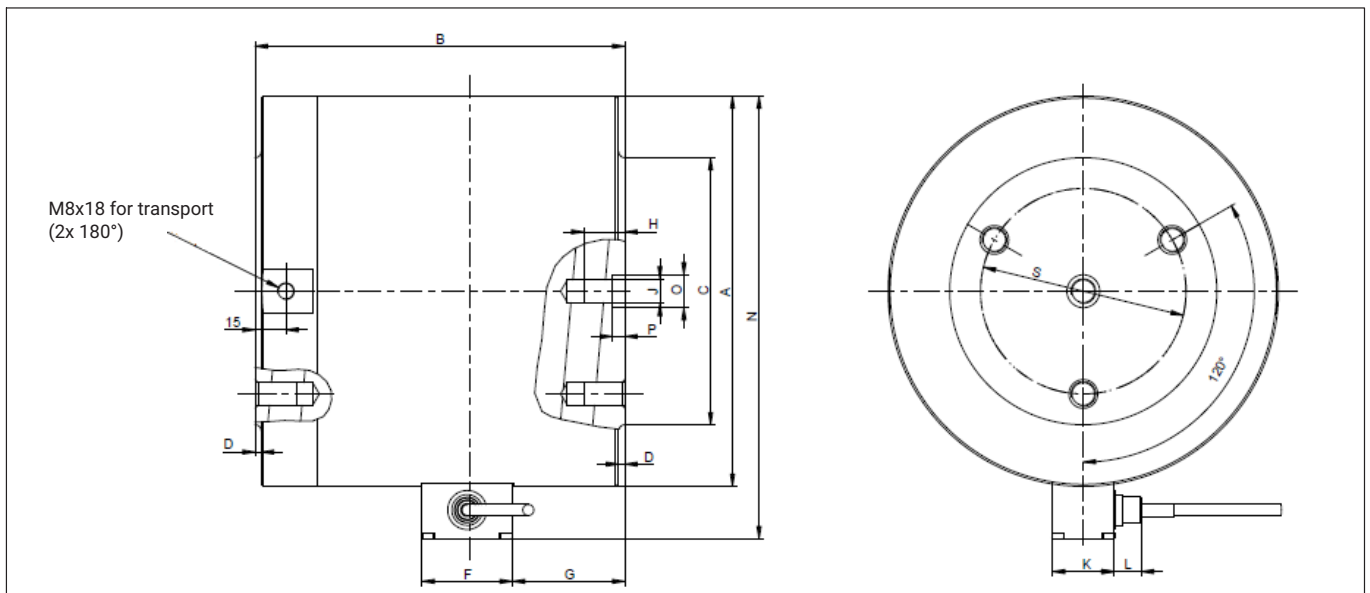

Nominal (rated) force	A	B	C	D	F	G	H	J	K	L ¹⁾	L ²⁾	N ¹⁾	N ²⁾	O F7	P	S
5 MN	190	180	130	3	44	55	20	M12	31	12	14	216	218	16	6	100±0.2
10 MN	267	240	180	3	44	96	30	M20	31	12	14	293	295	25	10	140


- 1) Fixed cable option
- 2) Plug option

Spherical cap ZK

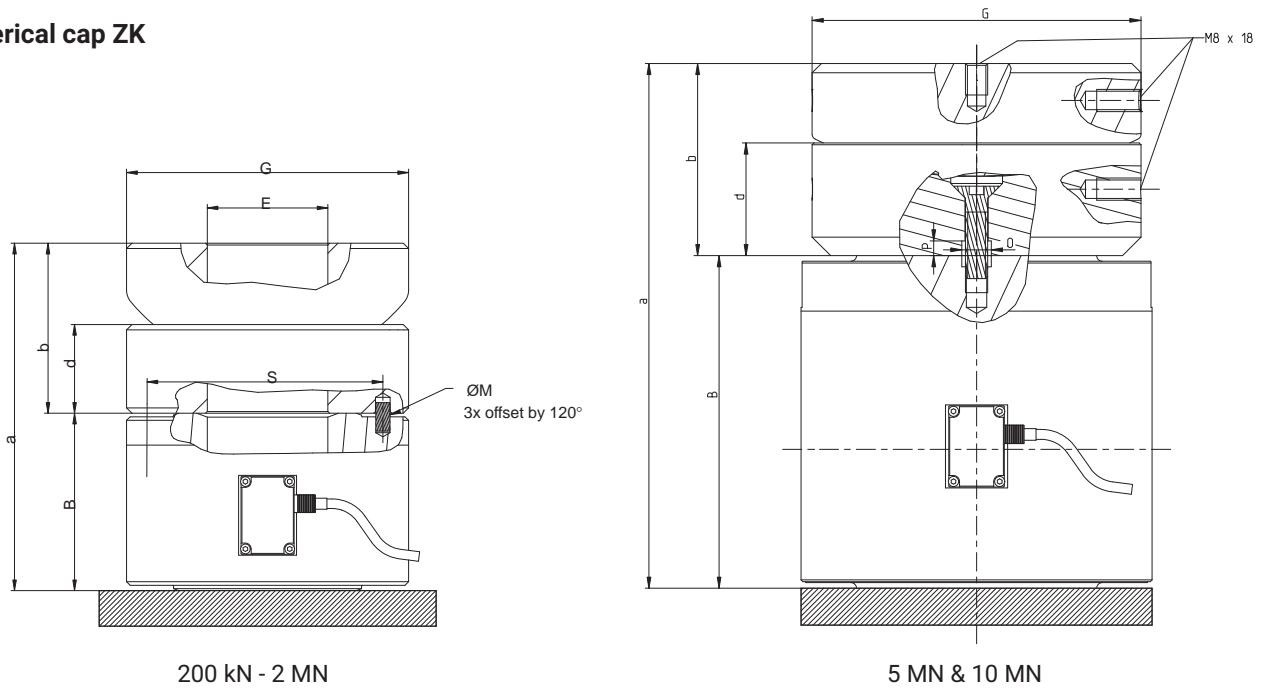


Nominal (rated) force	ZK ordering number	Weight in kg	B	E±0.1	G	M H11	O F7	P	S	a	b	d
200 kN ... 500 kN	1-C6/50T/ZK	1.7	60	32	82	6	-	-	64±0.1	112	52	28
1 MN	1-C6/100T/ZK	3.8	100	68	121	8	-	-	130±0.1	174.5	75.3	40
2 MN	1-C6/200T/ZK	11.6	100	68	159	8	-	-	130±0.1	195	95.5	50
5 MN	1-C6/500T/ZK	20.6	180	-	178	-	16	8		284	104	61
10 MN	1-C6/10MN/ZK	50.2	240	-	240	-	25	12		385	145	88

Load button ZL

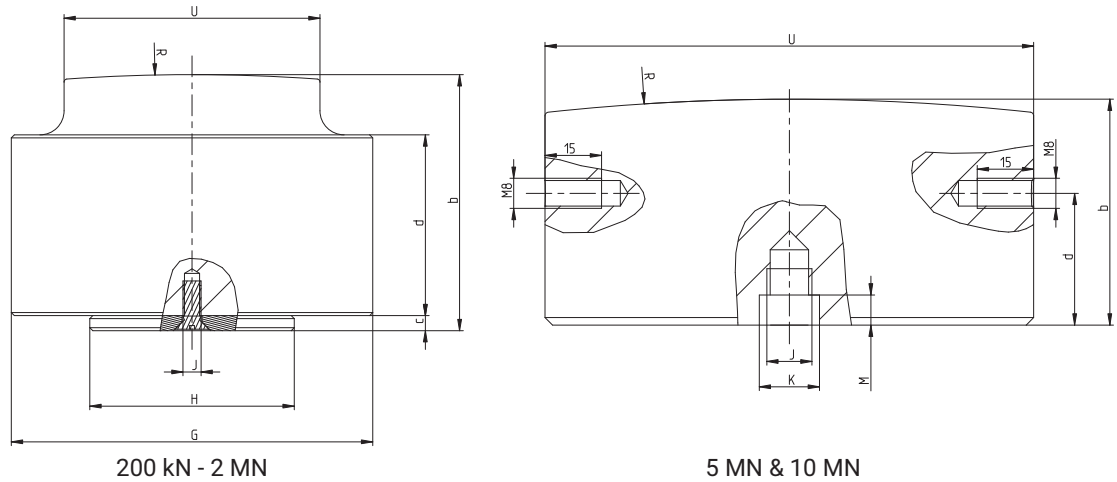

Nominal (rated) force	ZL ordering number	Weight in kg	G	H _{0.1}	J	R	U _{0.2}	K F7	M	b	c	d
200 kN	1-C6/20T/ZL	0.8	60	31.9	M5	300	32	-	-	50	5	30
500 kN	1-C6/50T/ZL	0.8	60	31.9	M5	300	44	-	-	50	5	30
1 MN	1-C6/100T/ZL	6.4	120	67.9	M6	600	64	-	-	85	5	60
2 MN	1-C6/200T/ZL	6.8	120	67.9	M6	600	85	-	-	85	5	60
5 MN	1-C6/500T/ZL	6.5	-	-	M12	600	129.8	16	8	60	-	35
10 MN	1-C6/10MN/ZL	30.1	-	-	M20	1000	219.8	25	12	110	-	67

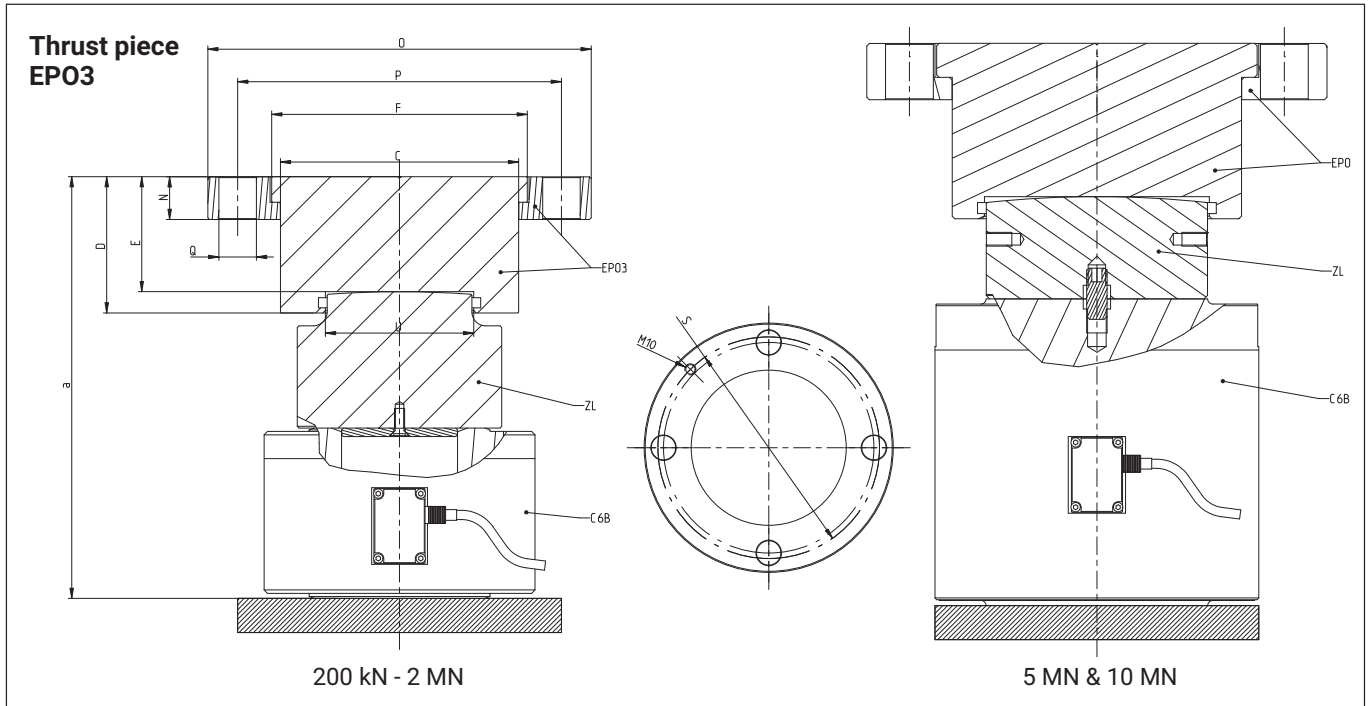

Nominal (rated) force	EPO3 ordering number	Weight in kg	C	D	E	F	N	O	P	Q	S	U _{0.2}	a
200 kN	1-EPO3R/20T	1.2	47.8	27.5	20	58	14	110	90	13	90	32	125
500 kN	1-EPO3/50T	3.4	81.8	50	39.5	89	10	147	120	18	130	44	144.5
1 MN	1-EPO3/100T	3.2	81.9	50	39.5	89	10	147	120	18	130	64	219.5
2 MN	1-EPO3/250T	13	139.8	80	67.5	150	25	225	190	22	200	85	247.5
5 MN	1-EPO3/500T	27	169.8	103	90	188	33	270	220	28	250	130	250
10 MN¹⁾	1-EPO3/10MN	55	260	140	120	290	-	-	-	-	-	220	430

¹⁾ Version with nominal (rated) force 10 MN is supplied without clamping ring

SPECIFICATIONS C6B

Nominal (rated) force	F_{nom}	kN		200	500				
		MN				1	2	5	10
Accuracy									
Accuracy class						0.5			
Relative reproducibility and repeatability errors in unchanged mounting position	b_{rg}	%		0.2	0.1	0.06			
When hardened compression plates are used				0.1	0.06				
If load button ZL is used, or with load button ZL and thrust piece EPO				0.2	0.1	0.06			
When used with spherical cap ZK									
Rel. reversibility error (hysteresis) at 0.5 F_{nom}	$V_{0.5}$	%		0.5					
When hardened compression plates are used				0.5	0.3				
If load button ZL is used, or with load button ZL and thrust piece EPO				0.5					
When used with spherical cap ZK									
Non-linearity	d_{lin}	%		1					
When hardened compression plates are used				0.4					
If load button ZL is used, or with load button ZL and thrust piece EPO				1					
When used with spherical cap ZK									
Relative creep	d_{crf+E}	%		0.06					
Effect of eccentricity	d_E	%/mm	0.2	0.06					
Temperature coefficient of sensitivity	TC_S	%/10K	0.1						
Temperature coefficient of zero signal	TC_0	%/10K	0.05						
Rated electrical output									
Nominal (rated) output	C_{nom}	mV/V	2						
Rel. zero signal deviation	$d_{s,0}$	%	1						
Deviation of the characteristic value with optional "adjusted rated output"	d_c	%		2.5					
When hardened compression plates are used				0.5					
If load button ZL is used, or with load button ZL and thrust piece EPO				0.5					
When used with spherical cap ZK									
Rated output range (without rated output adjustment)	C	mV/V	2 ... 2.48 mV/V						
Input resistance	R_e		380 ... 420						
Output resistance	R_a	Ω	280 ... 360						
Output resistance with "adjusted rated output" option	d_{Ra}		365						
Insulation resistance	R_{is}	G Ω	>5						
Operating range of the excitation voltage	$B_{U,G}$	V	0.5 ... 12						
Reference excitation voltage	U_{ref}		5						
Connection			6-wire circuit						
Temperature									
Reference temperature	T_{ref}	$^{\circ}C$	+23						
Nominal (rated) temperature range	$B_{t,nom}$		-10 ... +70						
Operating temperature range	$B_{T,G}$		-30 ... +85						
Storage temperature range	$B_{T,S}$		-50 ... +85						

Nominal (rated) force	F _{nom}	kN		200	500					
		MN				1	2	5	10	
Characteristic mechanical quantities										
Maximum operating force	F _G	% of F _{nom}	150							
Force limit	F _L		150							
Breaking force	F _B		>200					>180		
Static lateral force limit	F _Q	% of F _{nom}	No specification possible							
When hardened compression plates are used			20					10		
If load button ZL is used, or with load button ZL and thrust piece EPO			3							
When used with spherical cap ZK										
Permissible eccentricity	e _G	mm	5	6	11	12	10	10		
Nominal (rated) displacement	s _{nom}	mm	0.13	0.15	0.2	0.2	0.5	0.7		
Natural frequency	f _G	kHz	11.6	14.4	6.1	6.9	5.3	4		
Permissible oscillation stress	F _{rb}	% of F _{nom}	70							
Stiffness	C _{ax}	10 ⁶ N/mm	1.54	3.33	5	10	14.29			
General information										
Degree of protection in accordance with EN 60 529 with "fixed cable" (standard version)			IP68 ¹⁾							
Degree of protection in accordance with EN 60 529 with "bayonet connector" option, socket connected to sensor			IP67							
Degree of protection in accordance with EN 60 529 with "threaded connector" option			IP64							
Spring element material			Stainless steel							
Measuring point protection			Hermetically welded measuring body							
Cable (standard version)			Outside diameter 5.4 mm							
Cable length		m	6 or 15							
Mechanical shock resistance as per IEC 60068-2-6										
Number		n	1000							
Duration		ms	2							
Acceleration		m/s ²	650							
Vibrational stress as per IEC 60068-2-27										
Frequency range		Hz	5 ... 65							
Duration		min	30							
Acceleration		m/s ²	150							
Weight	m	kg	1.6	1.8	10.1	10.7	32.0	84.0		
	m	lbs	3.5	4.0	22.3	23.6	70.5	185.2		

1) Test condition: 1 m water column, 100 hours

SPECIFICATIONS C6B ACTIVE

Module type		VA1	VA2
Rated electrical output			
Output signal		0 ... 10 V	4 ... 20 mA
Nominal (rated) output		10 V	16 mA
Deviation of the characteristic value with optional "adjusted rated output"			
When hardened compression plates are used		10 V ± 0.25 V	16 mA ± 0.4 mA
If load button ZL is used, or with load button ZL and thrust piece EPO		10 V ± 0.05 V	16 mA ± 0.08 mA
When used with spherical cap ZK			
Zero signal		0 V	4 mA
Range of output signal		-0.3 ... 11 V	3 ... 21 mA
Cut-off frequency (-3dB)	kHz	2	
Supply voltage	V	19 ... 30	
Nominal (rated) voltage	V	24	
Max. current consumption	mA	15	30
Temperature			
Nominal (rated) temperature range		°C	-10 ... +50
Operating temperature range		°C	-20 ... +60
Storage temperature range		°C	-25 ... +85
Reference temperature		°C	+23

VERSIONS AND ORDERING NUMBERS

Code	Measurement range	Ordering number
200K	200 kN	1-C6B/200KN
500K	500 kN	1-C6B/500KN
1M00	1 MN	1-C6B/1 MN
2M00	2 MN	1-C6B/2MN
5M00	5 MN	1-C6B/5MN
10M0	10 MN	1-C6B/10MN

The ordering numbers shown in gray are preferred types. They can be delivered rapidly.

The ordering number for the preferred types is 1-C6B..., the ordering number for the customized versions is K-C6B-...

Rated output adjustment	Transducer identification	Mechanical design	Plug protection	Electrical connection	Plug version for the "permanently attached cable" option	Integrated amplifier
Not adjusted N	Without TEDS chip S	Without load application OO	Without plug protection U	With fixed cable, 6 m K	Free ends Y	Without integrated amplifier N
Adjusted J	With TEDS chip T	With spherical cap ZK	With plug protection P	With fixed cable, 15 m V	D-sub-HD15, 15-pin F	Amplifier VA1: 0...10V VA1
		With the ZL load button and EPO thrust piece EZ		With bayonet connector B	D-SUB-HD15, 15-pin Q	Amplifier VA2: 4...20 mA VA2
				With threaded connector G	Male connector ME3106PEMV N	
				M12 male connector, 8-pin, A-coded ¹⁾ 00A8	ODU male connector, 14-pin P	
					M12 male connector, 8-pin M	
					Without fixed cable O	

¹⁾ M12 male connector, 8-pin, A-coded only possible in conjunction with VA1/VA2

Rated output adjustment	The exact rated output is specified on the type plate. The sensor can be adjusted to an exact rated output of 2 mV/V. Then the relative tolerance of the rated output is dependent on the selected loading fittings. (see specifications, section "Rated electrical outputs"). You can connect the C6B in parallel if you order the sensor with adjusted rated output.
Transducer identification	Integration of TEDS chip (integrated electronic data sheet) as per IEEE 1451.4. If the relevant amplifier electronics are provided, the measurement chain will parameterize itself automatically.
Mechanical design	Standard delivery does not include load application parts. The C6B is optionally available with the appropriate load application parts and calibrated or adjusted.
Plug protection	A square profile is installed around the plug for mechanical protection. Dimensions WxHxD: 30 x 30 x 20 mm

Electrical connection	Permanently attached cable, 6 m is standard; options: Permanently attached cable, 15 m; bayonet connection (PT02E10-P-compatible); threaded connector (PT02E10-P-compatible)
Connector assembly	Mounted and verified plugs for direct use on HBM amplifiers. (Only in combination with permanently attached cable)
Integrated amplifier	The sensors can be purchased with an integrated amplifier, optionally delivering an output signal in volts or milliamps.

Cables/plugs	Ordering number
Configurable cable, available in different lengths and on request with plug mounted for connecting directly to the amplifier	K-CAB-F
Connection cable KAB157-3; IP67 (with bayonet connector); 3 m long, TPE outer sheath; 6 x 0.25 mm ² ; free ends, shielded, outside diameter 6.5 mm	1-KAB157-3
Connection cable KAB158-3; IP54 (with threaded connector); 3 m long, TPE outer sheath; 6 x 0.25 mm ² ; free ends, shielded, outside diameter 6.5 mm	1-KAB158-3
Connection cable KAB168 with M12 male connector, for connecting sensors with integrated amplifier. Available in 20 m (KAB168-20) and 5 m (KAB168-5)	1-KAB168-20; 1-KAB168-5
Loose cable socket (bayonet connection)	3-3312.0382
Loose cable socket (screw connection)	3-3312.0354
Ground cable, 400 mm	1-EEK4
Ground cable, 600 mm	1-EEK6
Ground cable, 800 mm	1-EEK8

托驰（上海）工业传感器有限公司
上海市嘉定区华江路348号1号楼707室
Tel. 021-51069888 Fax. 021-51069009
www.yanatoo.com zhang@yanatoo.com

Subject to modifications. All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.